



Directions for Assembling, Installing and Using the Cover Basket Spa Cover Remover

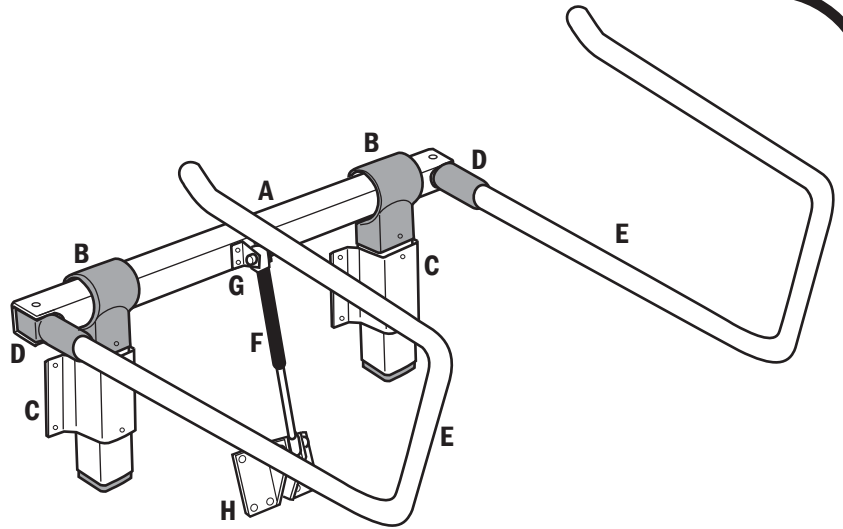


To assemble and install:

1. Keep Axle Bar **A** assembled as shown.



2. Center Axle Bar **A** on the side of the spa that the cover is to be removed on.


3. Position each Mounting Bracket **C** so that Bar **B** is 1-1/2" below the top of the spa lip.




4. Position each Axle Adjustment Bar **B** 1/8" from the inside of the Elbow insert hole at the end of Axle Bar **A**. Screw each Mounting Bracket **C** to the spa cabinet as close as possible to the bottom of the spa lip or top trim. Use the #10 x 1-1/4" screws provided.

For spas with wide or irregular trim or 'picture frame' type cabinets, it may be necessary to insert a wood shim. When parts are in place and mounted to the spa cabinet, lock **B** and **C** together by drilling the 1/2" self-tapping screws into the holes provided on each Bracket **C**.

5. Slide Catch Bar **E** into each elbow **D**. Push the 1/4" x 1-3/4" bolts through the pre-drilled holes, then install the flat washer and the nut. Install a 3/4" self-tapping screw into the side of Elbow **D** and Catch Bar **E**.




6. Screw the Gas Spring **F** into the Threaded Socket **G**, making sure both ends of the Gas Spring **F** are tightly screwed in threaded sockets **G** and **H**. The 1/4" bolts holding both Threaded Sockets **G** and **H** in their bracket should be loose enough to allow the Gas Spring **F** to move freely.




To assemble and install (continued):

7. To install the Gas Spring Bracket **H** to the spa cabinet, lift the Catch Bars **E** to the horizontal position, so the inside of the curve of the Catch Bar is level with the top of the spa lip, as shown. Insert the 1-1/4" screws into the pre-drilled holes in the Gas Spring Bracket **H**.

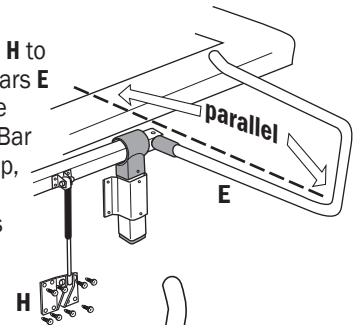

8. For each Black Plastic Bumper **I**, position it on the spa cabinet so the Catch Bar **E** will slide into it about 1-1/2" above the curve when in vertical position. Then, affix the Black Plastic Bumper to the spa cabinet with the two #8 x 3/4" screws, one at the top notch and the other at the bottom notch.



Please Note:


1. The **Cover Basket** is designed for the standard spa cabinet. Additional support may be required if the spa skirt was built with a lightweight material.
2. The **Cover Basket** is designed so the spa cover leans away from the spa. This is to prevent accidental damage to the cover remover.

To move the spa cover off:

1. **FLIP COVER:**



2. **SLIDE BACK:**



3. **LOWER DOWN:**




 ABC Spa Cover
 Removal Co. Ltd.

abcspa@telus.ca
www.spacoverremover.ca

NOTE: DO NOT SIT OR LEAN ON THE SPA COVER. DAMAGE MAY RESULT!